

MegaLine® F6-90 S/F Dx

S₃ P₃ A₄ C₄ E₅

LEONI

Type:


KS-02YSCH 2x(4x2xAWG 23/1 PIMF)

Category: 7



Construction:

- 1 Conductor: bare copper wire, AWG 23/1
 2 Insulation: cellular-PE, core-Ø: nominal value 1.4 mm
 Twisting element: pair
 3 Individual screen: aluminium-bonded polyester tape
 Twisting: 4 pairs
 4 Overall screen: tinned copper wire braid
 5 Outer sheath: halogen-free compound, shape 8 siamese, 2 base elements in parallel

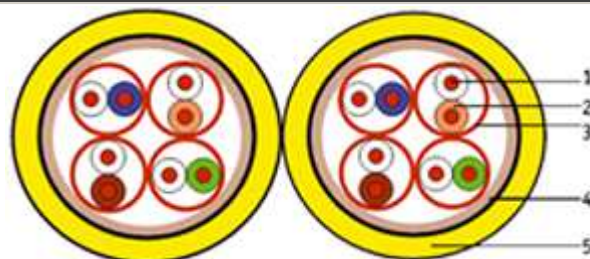

colour code: wh/bl, wh/or, wh/gn, wh/br
 Colour outer sheath: yellow, RAL-1021

printing outer sheath:


LEONI MegaLine F6-90 S/F 2x4P H SPACE Code 33445 Dca s2 d2 a1 DoP: CDESK0000006 Made in Germany \$Production lot code\$ \$Meter marking\$

OFFICE




fire behaviour:

flame resistance: acc. to IEC 60332-3-24
 halogen free: acc. to IEC 60754-1/2
 smoke density: acc. to IEC 61034-1/2
 Acidity: according EN 60754-2
 fire load (MJ/m): 1.2 (approx.)
 Class: D_{ca} s2 d2 a1
 according EN 50575 / EN 50399




performance:

better than Category 7 acc. to EN 50288 and IEC 61156 excellent
 NEXT, exzellente screen properties (pair- and overall screen), low
 Skew
 bandwidth (typical): 1000 MHz



applications:


Installation cable for generic cabling systems acc. to ISO/IEC 11801 and EN 50173 (3rd edition). Ideal for all applications of class D up to F Multimedia (Video, Data, Voice) >10 GbE acc. to IEEE 802.3 an, Cable sharing, VoIP, PoE/PoE+



mechanical characteristics:

bending radius:
 during laying: 8 x outer diameter (min.)
 acc. to Installation: 4 x outer diameter (min.)
 tensile loading (N):
 crush resistance (N/100mm):
 impact strength (quantity of impacts):


220 (max.)
 1000
 10



electromagnetic behaviour:

transfer impedance at 10 MHz (mOhm/m):
 screen attenuation up to 1000 MHz (dB):
 coupling attenuation up to 1000 MHz (dB):
 Segregation class according EN 50174-2::

5 (nominal value)
 70 (nominal value)
 85 (nominal value)
 d



MegaLine® F6-90 S/F Dx

S₃ P₃ A₄ C₄ E₅

LEONI


Type:

KS-02YSCH 2x(4x2xAWG 23/1 PIMF)



Electrical characteristics at 20°C:

conductor resistance (Ohm/km):	75 (max.)
insulation resistance (GOhm x km):	5 (min.)
mutual capacitance (pF/m):	42 (approx.)
capacitance unbalance (e) (pF/km):	1100 (approx.)
velocity of propagation (c):	0.80 (approx.)
phase delay (ns/100m):	420 (approx.)
delay skew at 100 MHz (ns/100m):	5 (approx.)
characteristic impedance at 100 MHz (Ohm):	100±5
test voltage Ueff (V):	1000
operating voltage (V):	125 (max.)

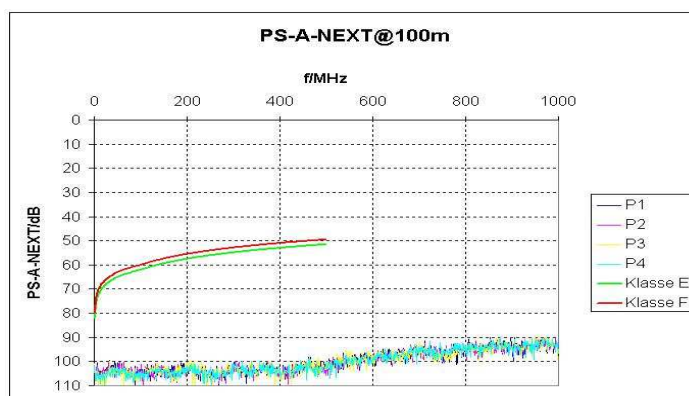

frequenz MHz	attenuation dB/100m		NEXT dB		PS-NEXT dB		ACR dB@100m		PS-ACR dB@100m		EL-FEXT dB@100m		PS-ELFEXT dB@100m		RL dB	
	typ.	Cat.7 max.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*
1	1,9	2	102	80	99	77	101	78	98	75	109	80	106	77	29	23
10	4,8	5,7	102	80	99	77	98	74	95	71	108	74	105	71	28	25
100	16,4	18,5	102	72	99	69	86	54	83	51	93	54	90	51	27	20,1
200	24,5	26,8	102	68	99	65	78	41	75	38	85	48	82	45	25	18
250	27,8	30,2	102	66	99	63	75	36	72	33	82	46	79	43	24	17,3
450	36,1	41,6	97	63	94	60	61	21	58	18	72	41	69	38	22	17,3
500	38,2	44,1	97	62	94	59	59	18	56	15	68	40	65	37	21	17,3
600	42,9	48,9	92	61	89	58	49	12	46	9	62	38	59	35	20	17,3
700	47,7	-	92	-	89	-	44	-	41	-	59	-	56	-	19	-
800	50,8	-	90	-	87	-	39	-	36	-	56	-	53	-	18	-
900	55,1	-	85	-	82	-	30	-	27	-	52	-	49	-	17	-
1000	58	-	80	-	77	-	22	-	19	-	42	-	39	-	15	-

* EN 50288-4-1(2014)/IEC 61156-5(2009)

OFFICE



Chemical characteristics:

Free of hazardous substances acc. to RoHS 2011/65/EU

Free of lackbewet substances (e.g. silicon oil)

Thermal characteristics:

Temperature range for fixed installation

Temperature range for mobile operation

-20°C up to +60°C

0°C up to +50°C

certificate and approbation:

quality seal with production control:

Link Performance:

test certificate:

conform to LVD (2014/35/EU)

Conform to CPR (EU/305/2011)

GHMT PVP

LEONI MegaLine® systems and further commercial plug-in connector

acc. to DIN 55350-18-4.2.1 bzw. EN 10204



Article Number:	Presentation (m)	Size:	Outer diameter (mm):	weight (kg/km):	copper sales factor (kg/km):	colour of outer sheath:
LKD7KS700110000	general	2x4P	7.5 x 15.2 (approx.)	117 (approx.)	70	yellow, RAL-1021
LK97KS700110010	100					
LK97KS700110025	250					
LK97KS700110050	500					
LK97KS700110100	1000					